



SP-CFW801L
SP-CFW801LN



Smart look Day/Night Varifocal Dome Camera with IR illuminator

Key Features

- High resolution: 800 TV lines
- High sensitivity with Day/Night function: 0.01 lux @ F1.2 (Color), 0 lux (B/W, IR LED is ON)
- IR LED equipped: The equipped infrared LED makes it possible to take pictures at zero lux
- BLC (Back Light Compensation)
- Digital Noise Reduction
- 2.8 - 12 mm Varifocal lens
- Wide coverage : Horizontal: 57°, Vertical: 41°
- Smart look fits for various applications such as shopping mall, hotels and hospitals
- IP66 rated water and dust resistant.
- Color CCTV Camera




Standard Accessories

- | | |
|-----------------------|-------|
| • User Manual..... | 1 pc |
| • Screw..... | 2 pcs |
| • Screw Plug..... | 2 pcs |
| • Screw Adjuster..... | 1 pc |

Specifications

Model		SP-CFW801L/ SP-CFW801LN
Camera	Image Sensor	1/4 " CMOS
	Effective Pixels	800 TVL
	Scanning Mode	2:1 Interlace
	Scanning Area	3.6mm(H) x 2.4mm(v)
	Scanning Frequency	H:15.734 KHz/V:15.625 KHz/V:50Hz
	Horizontal Resolution	800 TVL
	Minimum Illumination	0.01 Lux@F1.2, 0 Lux (IR On)
	IR LED Light	2 pcs Array LEDs
	IR LED Irradiation Distance	40 m
	Signal-to-Noise ratio	≥ 48 dB
	White Balance	Auto
	AGC	Auto
	Electronic Shutter	1/50 – 1/10,000 sec
	Day & Night	Auto
	Digital Noise Reduction	2D
	Back Light Compensation	BLC
	Synchronization	Internal
Lens	Focal Length	2.8 -12 mm
	Angular Field of View	H:20°(TELE)~68°(WIDE) V:15°(TELE)~51°(WIDE)
	Lens Type	M14
Input/Output	Video Output	CVBS : 1.0 V[p-p] / 75Ω Composite
General	Safety/EMC Standard	CE (EN 61000-6-3: 2007+A1: 2011, EN 50130-4: 2011)FCC (CFR 47 Part 15 Subpart B : 2013, ANSI C63.4-2009)
	Power Source and Power Consumption	DC 12 V ± 5% and ≤6W
	Ambient Operating Humidity	≤ 85% RH
	Water and Dust Resistance	IP66
	Dimensions (LxDxH)	139.5 x 97.5 mm
	Gross Weight (approx.)	0.68 kg
External Case		Aluminum Alloy

Appearance

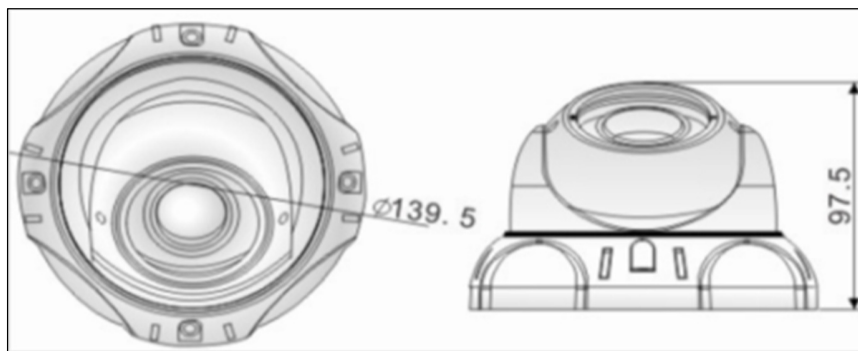

Important

- Safety Precaution : Carefully read the operating instruction manual before using this product.

- All TV pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY:

JIA YING TRADING PTE LTD

1 Rochor Canal Road, #02-67/69/34-37 Sim Lim Square, Singapore 188504

Tel: 63360404 Fax: 63380404 www.jiaying.com email@jiaying.com | jiaying@singnet.com.sg