Lines

Full HD 1080P HDcctv Box Camera

SSC-WD2201M

Full HD 1080P

FEATURES

- Full HD 1920x1080P@50/60fps (3G-SDI) Color Camera
- 1/2.8" Sony 3.0 Megapixel Progressive Exmor™ CMOS Sensor
- Color:0.1Lux@F1.2, B/W:0.01Lux@F1.2, Sense-up:0.001Lux@F1.2
- Simultaneous Video Output: SDI / HDMI / Composite BNC
- OSD Menu Control
- OSD Control / by RS485 Remote Control / by Coaxial Control
- Fog Reduction & 2D Noise Reduction & Sense Up Functions
- Shutter Mode (AUTO / MANUAL)
- Mechanical IR Cut Filter (ICR)
- RS-485x1, DIx1, DOx1 / Option: PoC + Audio

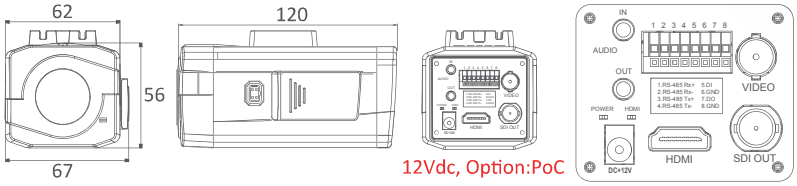

SPECIFICATIONS

Tol:±0.5 Unit:mm

	SSC-WD2201M
Video System	PAL / NTSC Selectable
Image Sensor	1/2.8" Sony 3.0 Megapixel Progressive Exmor™ CMOS Sensor
Resolution	1920(H)x1080(V)
Frame Rates	1920x1080P@50/60fps ; Adjustable to 1920x1080P@25/30fps, 1920x1080i@50/60fps
SDI Standards	3G-SDI (SMPTE 424M)
Minimum Illumination	Color:0.1Lux@F1.2, B/W:0.01Lux@F1.2, Sense-up:0.001Lux@F1.2
Digital Wide Dynamic Range	512X Normal Camera (54dB)
Digital Video Output	BNC connector (SDI) x1 / HDMI x1
Analog Video Output	BNC connector (1.0Vp-p Composite, 75Ω) x1
Audio	Option:Two-way Audio
Mechanical IR Cut Filter (ICR)	Automatically Switches (Switching Lux Level Can Be Adjusted) / External
IR LED ; Working Distance	Compatible with Infrared Illuminator
OSD Menu	OSD Control / by RS485 Remote Control / by Coaxial Control
Day&Night Mode	COLOR / B&W / AUTO / EXTERNAL
Multi-Electronic Shutter	Auto Shutter: Self Defined Auto Shutter Speed Range Programmable Manual Shutter: 1/50(60), 1/100(120), 1/150(180), 1/200(240), 1/250, 1/300, 1/350, 1/400, 1/450, 1/500, 1/600, 1/750, 1/1,000, 1/2,000, 1/3,000, 1/4,000, 1/10,000 sec.
Automatic Gain Control	128 Levels (Adjustable Level Settings)
White Balance	ATW / AWB / MANUAL / PUSH LOCK / 3200K / 6300K
WDR ; BLC	WDR / BLC / OFF
Fog Reduction	16 Levels (0~15)
Flickerless	PAL 50Hz / NTSC 60Hz / OFF
Dynamic Noise Reduction	2D
Sense Up	ON (2~6X) / OFF
Language	ENGLISH / JAPANESE, TRADITIONAL CHINESE, SIMPLIFIED CHINESE (Option Not Changeable)
Image Setting	SHARPNESS / CONTRAST / SATURATION / HUE / MIRROR
Privacy Zone Mask	ON / OFF (16 Zones Programmable, Mosaic)
I/O Connector	RS-485(Pelco-D/P)x1 / DIx1 / DOx1, Option:Audio In(3.5mm)x1 / Audio Out(3.5mm)x1
Automatic IRIS ; Connector	DC ; D4 IRIS Jack
Lens Mount	CS / C mount (With Adaptor Ring)
Lens, Angle of View (H)	Lens Option: Please See the Page of Lens Series
Water Resistance	NA
Max. Breaking Strength	NA
Power Supply ; Consumption	Standard:12Vdc, Option:PoC (Power over Cable) ; 4.2W
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C
Operation ; Storage Humidity	Maximum: RH80% ; RH90%
Dimensions	62(W)x56(H)x120(L)mm
Net Weight	350g
Accessories Option	Lens:SHV-3M2812DAI, SHV-3M04NI ; SDI Receiver:SSD-RX010, SSD-RX010N, SSD-RX011, SSD-RX011N

JIA YING TRADING PTE LTD 1 Rochor Canal Road #02-67/ 69/ 34-37 Sim Lim Square, Singapore 188504
Tel: 63360404 Fax: 63380404 www.jiaying.com email@jiaying.com